

SLIM B2 OCTA MOTION

87x51 cm

automatic opening

connection planning

power consumption max

Security / Network connection

Main dimensions (width /depth /height)

Gross weight:

Netto weight:

INDUCTION HOB

4 inductionzones

the two external zones left and right x 1,6 kW (Booster 1,85 kW)

the two internal zones x 2,1 kW (Booster 3 kW)

2 bridge functions: each couple left and right max. 3,7 kW

power consumption max 7,4 kW

9 speeds + Booster for each cooking zone

Touch control

4 Boosters

Timer function 1-9 minutes on each cooking zone

countdown function: from 1 minute to 9 hours 59

minutes but, opposite to timer function, this function does not shut down the cooking zones

Child-Lock safety function

Automatic shut down

Pot detection

€ 824,00

220-240 V / 380-415 V 2N

50/60 Hz

7,4 kW

2 x 16 A - 1 x 32 A

870/510/67mm

39,65 Kg.

30,80 Kg.

180x220 mm



Residual heat indicator

EXTRACTION SYSTEM

Energy-efficiency rating A++ (starting from 2018 A+++)

EBM brushless fan

Max. air flow: 850m³/h

IEC air flow: 803m³/h

Motor 170 W

Noise level min. 48 dBA - max. 66 dBA - Int. 74 dBA

POSSIBILITY TO INSTALL THE FIRST DRAWER TOO!

Grease filter efficiency rating: B

Average energy consumption : 35 kWh/year

For extraction or recirculation vented system (For recirculation vented system für charcoal filters are needed)

6-stage fan output: 4 power settings + 2 intensive settings

2 Intensive settings with 2 automatic reset

Switch Exhausting / Filtering

In the exhausting versions the two intensive setting are timed as requested from efficiency norms

In the filtering version the two intensive settings are not timed

Automatic over-running of fan blades of 5/10 and 20 Minuten with LED display

Grease and Charcoal filters reset key


Cleaning message:

After 30 hours of hood operation, the control indicate the need to clean the grease filters; this alarm prevents the operation of the suction system until it is reset, to allow the condensate tray to empty

condensate tray capacity 0,75 Litre

Metal grease filter, suitable for dishwasher use

In filtering modus after having shut down the system it goes on functioning at a very low level to dry the exhausting pipes!

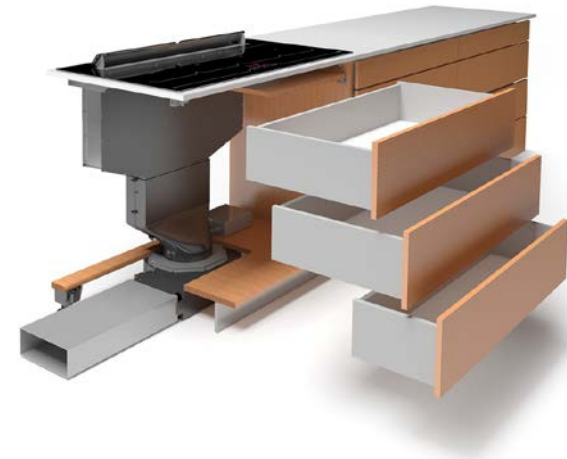

Special accessories:

Charcoal filters needed for the filtering version: AFFCAASPI (€ 23,30)

Grease filter efficiency rating: B

Special polyurethane filters:

polyurethane filter that allows achieving a filtration efficiency more than 98%.

Thanks to its new technical composition, grease particles are captured and retained as never before. This results in significantly higher filtering efficiency than that obtained with other filters in the market